

# AAP-0500

## Cable sensor térmico analógico. Recubrimiento Polipropileno. 500m

### General

---

The AAP-0500 is an analogue linear heat detection cable in a Polypropylene outer sheath, supplied in 500m lengths. The clear polypropylene outer sheath provides additional chemical protection allowing it to be installed in more caustic environments.

In temperature sensitive environments early detection of an abnormal change is crucial to protect safety of life, critical processes and reduce losses. The AA analogue range of linear heat detection cable use exceptionally durable linear heat detection technologies which provide extensive and continuous coverage, is easy to install and fully integrate with building management systems. The products offer an enviable set of features bringing enhanced benefits and increased safety to the fire protection industry worldwide.

### Fast Response Time

---

This unique sensor cable and its method of control continuously responds to changes in temperature. The technology offers the facility to programme an early warning pre-alarm as well as the specified alarm temperature. If the temperature surrounding the cable reaches the pre-alarm point, the control unit triggers a warning giving the user time to survey the area at risk. Only when the temperature reaches the specified set alarm point will the control unit trigger full alarm.

### The Controller

---

The optional two stage programmable alarm settings make the system and method of overheat detection incredibly flexible and ideal for use in a variety of different environments and applications. The technology automatically compensates for changes in the ambient temperature to maintain the accuracy of alarm temperature as well as offering up to 500 metres of continuous detection per control unit.

Two control units are available. One is a self-contained unit or, for finer control, a version requiring a PC prevents uninvited system access. Both designs are compatible with any conventional or addressable fire alarm panel or other building management system.

### Reset and Reuse

---

Analogue LHD cable is "self-restorable" which means it not always necessary to replace the cable after an incident. Once the alarm has been triggered and depending on the severity of the incident the system can simply be reset with minimum disruption and inconvenience.



### Detalles

---

- RoHS compliant and CE certified to meet end user specifications
- Open and short circuit detection reduces the risk of false alarms
- Optional pre-alarm setting allows the user to manage risk more effectively
- Cable based sensing allows detection at the point of risk
- Low installation and maintenance costs reduce total cost of ownership
- Suitable for installation in hazardous areas

# AAP-0500

## Cable sensor térmico analógico. Recubrimiento Polipropileno. 500m

### Especificaciones técnicas

#### Eléctrico

No. of cable cores 4

#### Detección

Longitud de la zona 30.5 m to 500 m (min. to max.)

#### Conductor

Core colours Red, White, Clear, Clear

#### Físico

Peso neto 15.215 kg

Tipo de Montaje Fijación por cable

#### Medioambiental

Temperatura de funcionamiento -40 to +125°C

Humedad relativa 0 to 90% noncondensing

Entorno Interior, Exterior

#### Regulador

Certificación CE

#### Mechanical

Outside diameter 5.50mm +/- 0.075mm (0.217" +/-0.003")  
(Nominal)

#### Environmental

Operating temperature limits -40°C to +125°C


Operating temperature (continuous) -40°C to +90°C

#### Detection

Ambient Temperature upAlarm Temperature - 54°C to 30°C

Ambient Temperature upAlarm Temperatures - 64°C / 72°C / 79°C to 47°C

Ambient Temperature upAlarm Temperatures - 86°C / 100°C to 69°C

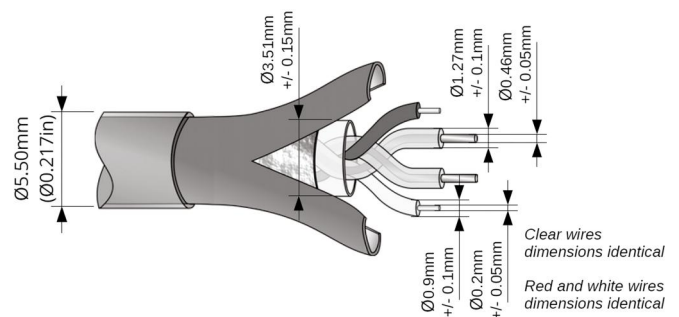

Como empresa innovadora, Carrier Fire & Security se reserva el derecho de modificar las especificaciones de los productos sin previo aviso. Para conocer las últimas especificaciones de los productos, visite la Web de [es.firesecurityproducts.com](http://es.firesecurityproducts.com) o póngase en contacto con su comercial.

Last updated on 8 September 2023 - 12:32